




**Anhui Yechuang Machinery Technology Co.,Ltd.**

Tel: 0086-0555-6063866 Fax: 0086-0555-6063866

E-mail:sales@ahycmm.com WEB:http://www.ahycmt.com

Office ADD.:No.504,Taifang Road,Bowang District,Maanshan City,Anhui Pro.,China 243131

**Twin shaft Concrete Mixer**

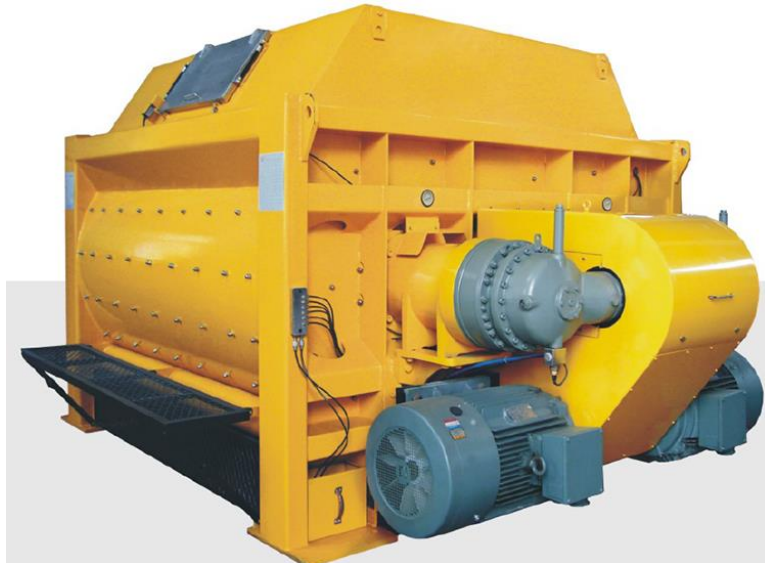

JS Series Standard Twin-shaft Concrete Mixer,inspired by advanced technologies from home and abroad,was manufactured by our company in the year 2004.Ever since it was sold into the market,its stable performance and excellent quality have quickly won the trust of majority of users.Now it has become our star products.It is mainly used in the mixing plants of high speed railways,expressways,airports,hydro power stations,commercial concrete and so on.

SPECIFICATIONS FOR JS SERIES STANDARD TWIN-SHAFT CONCRETE MIXER						
MODEL	Charging Capacity(L)	Discharging Capacity(L)	Production Capacity(m3/h)	Mixing Motor Power(kw)	Mixing Time(s)	Transportation Dimensions (L*W*H)(mm)
JS1250	2000	1250	75	2*22	≤40	3000*2100*2900
JS1500	2400	1500	90	2*30	≤40	2900*2320*2150
JS2000	3200	2000	120	2*37	≤40	3450*2320*2250
JS3000	4800	3000	180	2*55	≤40	3900*2600*2230
JS4000	6400	4000	240	2*75	≤40	4500*2600*2230
JS5000	7200	5000	270	2*75	≤40	4700*2600*2280



## Anhui Yechuang Machinery Technology Co.,Ltd.

Tel: 0086-0555-6063866 Fax: 0086-0555-6063866

E-mail:sales@ahycmm.com WEB:http://www.ahycmt.com

Office ADD.:No.504,Taifang Road,Bowang District,Maanshan City,Anhui Pro.,China 243131

- This host monitoring system has applied for national patent. Real-time system for hydraulic pumps and retarder oil temperature, oil monitoring, through the monitor realization of Chinese information tips and acousto-optic alarm. Users can discover and deal with faults to improve the service life of the host machine.



- Using high-performance angular transmission reducer and motor makes the whole machine in stable running, low noise, large output torque and durability.



- Shaft end sealing uses a unique differential pressure type multi-sealing technology, greatly improving the service life of the shaft ending.



- Adopt advanced hydraulic system to open and shut the discharging door, under the circumstance of sudden power failure, the manual pump is used to open the discharging valve to make an urgent discharge, to prevent the agglomeration of concrete in the mixer silo.






**Anhui Yechuang Machinery Technology Co.,Ltd.**

Tel: 0086-0555-6063866 Fax: 0086-0555-6063866




E-mail:sales@ahycmm.com WEB:http://www.ahycmt.com

Office ADD.:No.504,Taifang Road,Bowang District,Maanshan City,Anhui Pro.,China 243131

- The mixing system adopts the design of multi mixing blades,with no dead angle,which enables to have the perfect mixing efficiency in a short time.

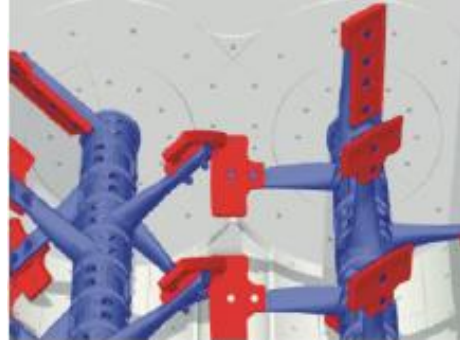

**外形及安装尺寸** Shape and install Size

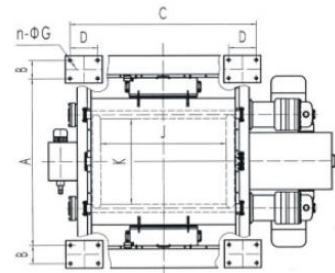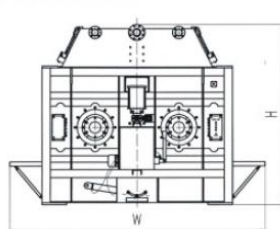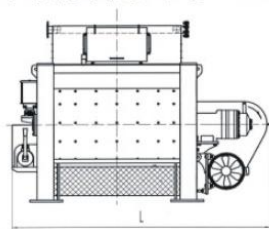

Model Size(mm)	A	B	C	D	N	G	L	W	H	J	K
JS1250	1760	140	1878	200	16	22	3000	2750	2000	1330	790
JS1500	1820	200	1822	200	8	32	2900	3000	2150	1120	910
JS2000	1820	200	2250	200	8	32	3450	3000	2230	1460	885
JS3000	1820	200	2615	300	16	30	3900	3300	2230	1840	990
JS4000	1820	200	3065	300	16	30	4500	3300	2230	2250	970
JS5000	1820	200	3265	300	16	30	4700	3300	2280	2450	970

**Anhui Yechuang Machinery Technology Co.,Ltd.**